


DAILY CARE

EMPTYING THE DRIP TRAY

1. Lift out and empty drip tray. CAUTION – CONTENTS MAY BE HOT
2. Separate drip tray and cup stand
3. Clean them in warm soapy water, wipe area left by drip tray
4. Reassemble and replace carefully

WARNING - HANDLE DRIP TRAY AS REF. A

Notice • The brewer does not tell you when the drip tray is full so make sure you check it regularly

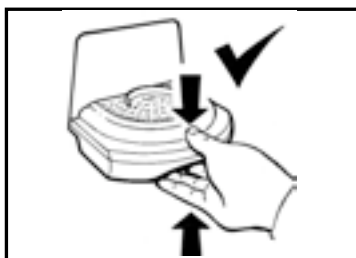

Ref. A

EMPTYING THE FILTERPACK BIN

1. Remove drip tray
2. Pull bin forward
3. Empty filterpack bin
4. Clean bin in warm, soapy water
5. Replace bin
6. Replace drip tray



Notice

- Take care when removing filterpack bin
- The act of removing the bin resets the bin counter - Always empty the bin if removed

Notice



- If filterpack bin fills right up, the “check bin” message will be displayed
- If your FLAVIA® brewer is on a base unit, the “check bin” message will not be displayed

REFILLING WITH WATER (Manual fill only)

1. Lift the filler lid
2. Fill with water
3. Maximum fill level reached when the red float cap pops up
4. Close the filler flap

Notice

- Only use cold water when refilling
- Take care not to overfill tank
- If tank runs out before water is refilled, the display will read “ADD WATER”
- If tank is overfilled water will flow out from underneath filterpack door and into drip tray*

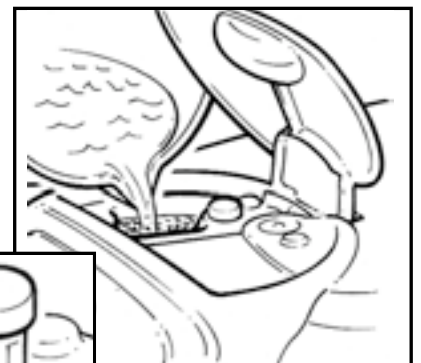

* Only applies to models of brewer with an air duct fitted

WEEKLY CARE

GENERAL CLEANING

Use a damp cloth to wipe the outside surfaces and the areas that are exposed inside.





Notice

- Do not use strong detergents and take care not to get soapy water into the water tank as this will affect the drink taste

ENG



CLEANING THE WATER FILLER FUNNEL

1. Open filler lid
2. Remove filler funnel assembly
3. Clean them
4. Rinse thoroughly (so no soap gets into tank)
5. Replace
6. Close the filler flap

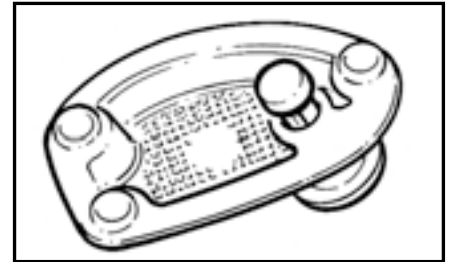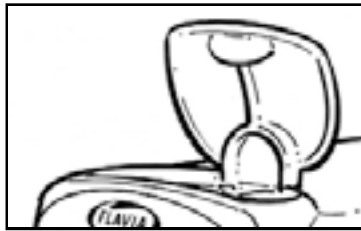


CLEANING THE FILTERPACK DOOR


1. Grip bottom of filterpack door
2. Use other hand to steady the brewer.
3. Pull sharply from bottom towards you
4. Wash in warm soapy water and rinse thoroughly
5. Wipe sides of area where door was
6. Replace door – **Top first**
7. Push bottom of door until you hear a 'CLICK'

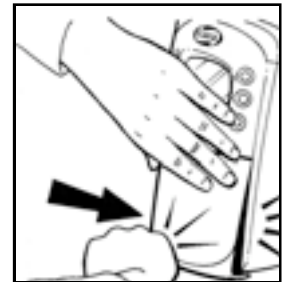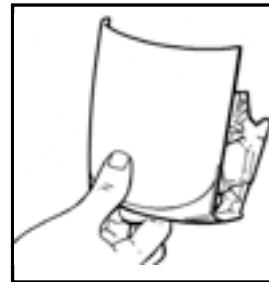

CLEANING THE CUP DETECT AND AIR DUCT

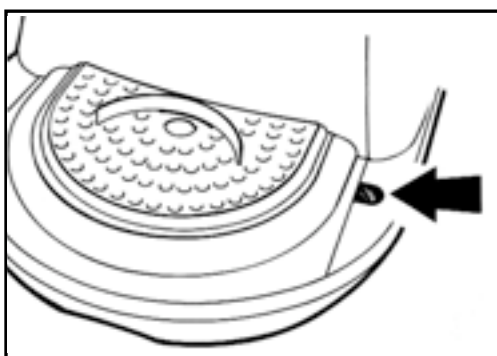

Ensure sensor is wiped clean and not obstructed

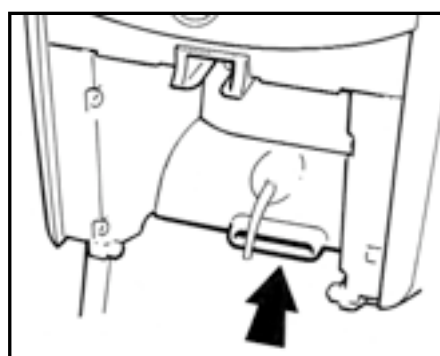

Ensure air duct is clean and free of debris

Notice

- Remove filterpack door to access air duct

SANITISING

- After cleaning, sanitise surfaces with a non-chlorine based anti-bacterial wipe or solution.
- Avoid scented products, as this will affect the drink taste.